

Shimmer Large Pendant

CAUTION: BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN UTIITY BOX.

Important Safety Information:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- Professional installation is recommended.
- This fixture has been rated for up to (1) 60-Watt maximum Type A standard incandescent light bulbs (not included) or (1) 13-watt compact fluorescent bulbs (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- To reduce the risk of fire, electrical shock or personal injury, always turn off the light fixture and allow it to cool prior to replacing the light bulb.
- When lit, the bulb can become very hot. Do not touch the bulb when the fixture is turned on.
- Keep flammable material away from the lit bulb.
- Save this instruction.

WARNING: This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

Recommendations:

- 1. For your safety and convenience, installation by two people is recommended.
- 2. Remove all parts and hardware from box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

PARTS INCLUDED:

- (1) Lamp body (A)
- (1) Socket (B)
- (1) Cable (C)
- (1) Canopy (D)
- (1) Mounting Plate (E)

HARDWARE INCLUDED

- (1) Green ground screw (a)
- (2) Mounting screws (b)
- (3) Plastic wire connectors (c)
- (2) Flat-head screws (d)


TOOLS REQUIRED (not included)

- 1. Electrical tape
- 2. Screwdriver
- 3. Two people recommended

To Install the Fixture:

- 1. Carefully unpack all fixture parts and hardware and lay them on a clean workspace.
- 2. Remove the prior light fixture if there is one and carefully pull the wire ends out from the ceiling-installed junction box.
- 3. Use appropriate wire cutters to trim the existing wire ends clean and then use appropriate wire strippers to remove about 1 inch of wire-covering (insulation) so that about 1 inch of metal wire is exposed.
- 4. Carefully inspect the pendant's fixture wires. The NEUTRAL FIXTURE WIRE is marked "N". The HOT FIXTURE WIRE is marked "L" (for "Live"). And the GROUND WIRE is marked "Earth".
- 5. Attach the Ground Wire from the fixture to the Ground Junction Box Wire from the outlet. Fasten each together with a Plastic Wire Connector (c) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet box DOES NOT have a GROUND WIRE, be sure to insert the Green Ground Screw (a) into the Mounting Plate (E) facing DOWN, and wrap the fixture's bare ground wire around the Green Ground Screw (a). IT IS IMPERATEIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 6. Connect the NEUTRAL FIXTURE WIRE (Marked "N") to the NEUTRAL JUNCTION BOX WIRE (usual white). Fasten each together with a Plastic Wire Connector (c) and wrap the connection with electrical tape. Be sure no wire strands are exposed.

- 7. Connect the HOT FIXTURE WIRE (Marked "L") to the HOT JUNCTION BOX WIRE (usual black). Fasten each together with a Plastic Wire Connector (c) and wrap the connection with electrical tape. Be sure no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 8. Gently tuck the wire connections neatly into the ceiling junction box.
- 9. Attach the Mounting Plate (E) to the ceiling outlet box using the enclosed Mounting Screws (b). Tighten Mounting Screws (b) with a screwdriver.
- 10. Position Canopy (D) up over Mounting Plate (E) and thread the Flat-head Screws (d) through the holes of the canopy and into the Mounting Plate (E). Tighten with a screwdriver.
- 11. Insert a bulb Max 60-Watt Maximum TYPE A standard incandescent light bulb (not included) or 13-watt compact fluorescent bulbs (not included) into the Socket (B). DO NOT EXCEED SPECIFIED WATTAGE.
- 12. Installation is complete.
- 13. Restore power to junction box and test fixture.

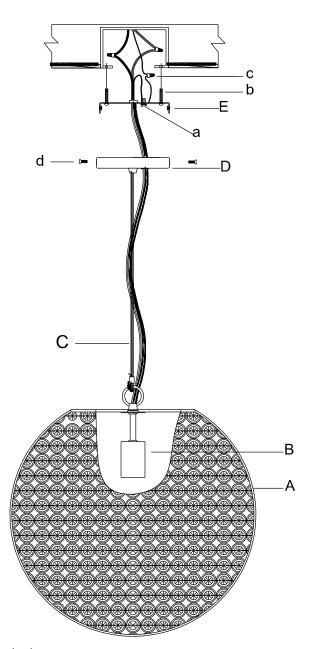

Care Instructions:

Wipe clean using a soft, dry cloth or static duster.

Always avoid the use of all chemicals and abrasive cleaners as they may damage the lamp's finish.

Thank you for your purchase. www.pbteen.com