



The hardware included with this item is meant for drywall or stud mounting only. If your walls are made from concrete, brick or plaster, please consult your local hardware store for assistance in selecting the appropriate hardware.


Wall-Mounted Unicorn Head – Gold

Tools needed: Pencil, Tape Measure, Philips screwdriver, Stud-Finder

Hardware: ONE Anchor and Screw

Assembly Instruction

This unicorn head is shipped in parts and requires some simple assembly before mounting the head to a wall. The unicorn head includes two ear holes on opposing sides and one central mounting hole for the horn. The ears and the horn include mounting ends that are simply inserted with light force into their appropriate mounting hole located on the head (the ears are sized to fit only ear holes). They each are held in place by mere friction, but may be rotated as desired.

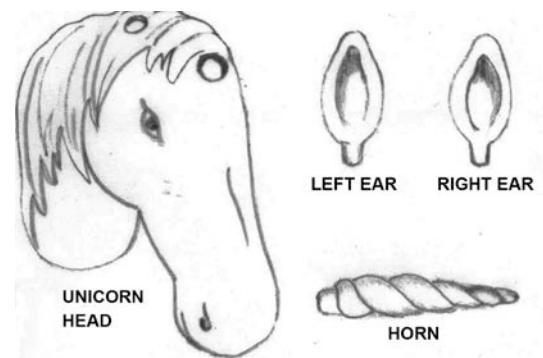

The back of the unicorn head includes a single central D-ring that is used for hanging. Use a tape measure to measure the distance between the top of this D-ring and the top of the head that contacts the wall. This is the “D-ring distance.”

Mounting Instructions: Now that you have it assembled, let’s get it up on a wall!

- Step 1) Perhaps with the help of another person, hold the unicorn head upright against a wall (with the head facing away from the wall) at a desired location. Use the pencil to mark the highest part of the head that still contacts the wall. Then set the head aside.
- Step 2) Use a tape measure and the pencil to make a second “lower” mark located directly below the mark you made in Step (1). The lower mark must be spaced a distance equal to the “D-ring distance.”
- Step 3) Use a stud-finder to determine if the lower mark of Step 2 happens to align with a wall stud. If so, use a screwdriver to secure a screw at this mark directly into stud - do not use a provided anchor. Rotate the screw clockwise until the screw head is about 3/8 inches from the wall.
- Step 4) If the lower mark does not align with a wall stud, install an anchor and then a screw. To do this, engage a Phillips screwdriver with an anchor and position the tip of the anchor over the lower mark on the wall. Firmly push the anchor into the wall as you rotate it clockwise. The anchor will drive itself into the wall like a large screw. Continue rotating until the wide part of the anchor becomes even with the wall.
- Step 5) If you have installed the anchor, insert a screw into the anchor and then rotate the screw clockwise until its head is about 3/8 inch from the wall.
- Step 6) Mount the item by engaging the D-ring located on the back of the head onto the protruding screw head and then lowering the item until the screw supports the full weight.

Care Instructions: To clean: Wipe with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.

Thank you for your purchase!
www.pbteen.com